

PS3-HX ABC

Presurizado Polvo 3 kg

CUERPO ACERO

Cilindro de acero embutido en 2 piezas, soldado. Pintado exteriormente con resina de poliéster.

VÁLVULA RESINA ACETÁLICA

Válvula accionada por maneta con empuñadura y cuerpo de resina acetálica, que garantiza una protección perfecta contra la corrosión. La válvula está equipada con un filtro sinterizado para proteger las partes sensibles.

AGENTE EXTINTOR

Polvo extintor seco polivalente ABC, certificado según EN 615.

PROPELENTE

El gas propulsor es nitrógeno. Se agrega un pequeño porcentaje de helio para permitir la detección electrónica de fugas.

EMBALAJE

Caja de cartón de 4 unidades, robusta y apta para el transporte.

ANAFGROUP

Rangos de temperatura
-30° + 60°

EN3 CE 0029 M.E.D. 2014/68/EU On Request


A 13 B 89 C ✓



Configuración	● Estándar	○ Bajo Pedido
EMBALAJE		○ Caja 4 pcs
SOPORTE		● Soporte PS3-XC

Technical data

FIRE RATINGS	13A 89B C	
CHARGE	3 kg ±2%	
MATERIAL	STEEL	
CYLINDER	Manufacturing process	Deep Drawing
	External painting	Polyester Resin
	Corrosion resistance	480 H SECONDO ISO 9227:2017
EXTINGUISHING AGENT	POWDER ABC A33	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 13 s
PRESSURE	Operating pressure at 60 °C	15 bar
	Operating pressure at 20 °C	13 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	385 mm
	Bottle outer diameter	130 mm
WEIGHT	Empty / Charged	1,43 kg / 4,43 kg
PACKING SPECIFICATIONS	Standard packing	4 Pieces cardboard box
	Carton size (B x L x H)	275 x 275 x 397 mm
	Weight per carton	18,1 kg
	Pallet	36 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1341 mm
	Pallet volume	1,29 m3
	Weight per pallet (net/gross)	652 kg / 672 kg

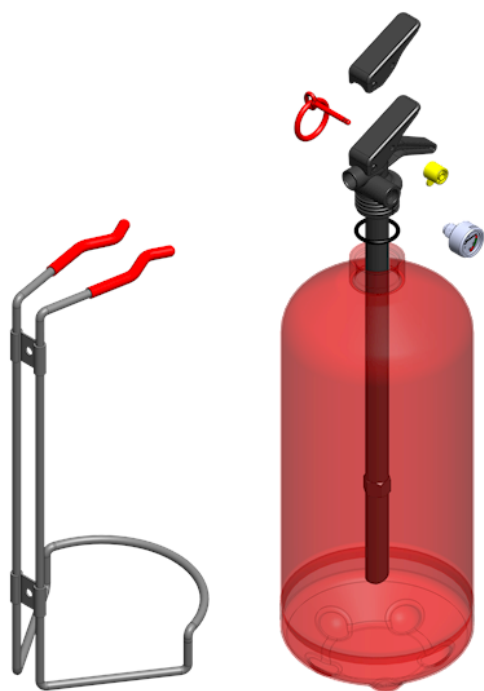

Spare parts list

Description	Code
TRANSPORT BRACKET	00.241C.2960.00K0
PRESSURE GAUGE	00.652A.4900.10K0
O-RING 25.00 X 3.00	00.652A.5010.00K0
SAFETY PIN	00.652A.5020.00K0
SEAL	00.652A.5030.VEK0
BLACK LEVER	00.652A.6050.00K0
DIP TUBE	00.692C.5900.00K0
VALVE ASSEMBLY WITH LEVEL	00.692C.8505.21K0